




Fiber Patch Cord Model Code Selection Guide

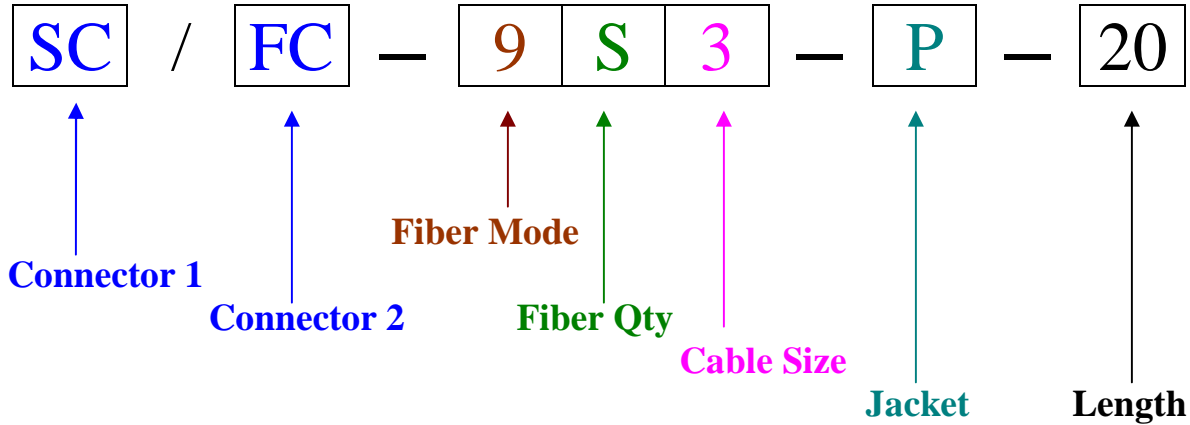

Select from following options:

Connector 1 & 2:
SC: SC/UPC connector
FC: FC/UPC connector
ST: ST/UPC connector
LC: LC/UPC connector
MU: MU/UPC connector
DIN: DIN/UPC connector
D4: D4/UPC connector
MTRJ: MTRJ/UPC connector
SMA: SMA/UPC connector
ESCON: ESCON/UPC connector
MPO: MPO/UPC connector
E2000: E2000/UPC connector
SCA: SC/APC connector
FCA: FC/APC connector
LCA: LC/APC connector
DINA: DIN/APC connector
E2000A: E2000/APC connector
XX: pigtail (no connector)

Fiber Mode:
9: Single mode 9/125 μm
5: Multimode 50/125 μm
6: Multimode 62.5/125 μm
M3: OM3

Jacket Material
P: PVC
L: LSZH

Fiber Qty:
S: Simplex (one fiber)
D: Duplex (two fibers)

Length:
Specify in Meters

Cable Diameter:
0: 0.9 mm
2: 2.0 mm
3: 3.0 mm

Example: Model code SCA/FC – 9S3 – P – 20

SC/APC connector on one end; FC/UPC connector on other end; Single mode 9/125 μm fiber, simplex, 3.0 mm cable diameter, with PVC jacket, total length 20 m.

Custom made cable assemblies available on request.